




Unique measurement geometry, entry level price

What's Distinctive:

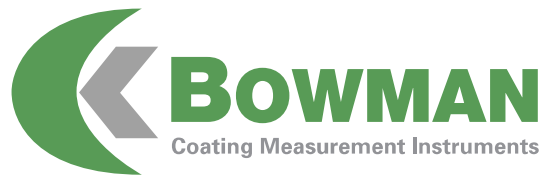

G SERIES XRF

High Precision Coating Measurement System



Who Benefits

The G Series XRF is ideal for labs and production lines particularly where users have:

- › Limited benchtop space
- › Budget limitations
- › A preference for "bottom-up" operation with a motorized Z axis
- › The need to position smaller samples quickly and easily

Key Features

The two most distinctive features of the G Series are precision video imaging, and "bottom-up" measurement using a motorized Z-axis with laser-based auto-focus. The latter is a feature unique to Bowman. An available manual XY stage with 1.5 X 1.5" travel facilitates easy positioning of small and large parts.

Configuration

The standard configuration includes a single fixed collimator and a fixed focus camera. An SDD detector is included, along with our long-life micro-focus x-ray tube. As with all Bowman benchtop XRFs, instruments can be upgraded to include multiple collimators or a variable focal camera.

© Copyright 2022 Bowman



Made
in the USA

BOWMAN

1125 Remington Rd.
Schaumburg, IL 60173

› 847.781.3523
› www.bowmanxrf.com
› sales@bowmanxrf.com

XRF Equipment • Local Tech Support, Worldwide • Standards • ISO/IEC 17025 Accredited Lab



BOWMAN G SERIES XRF

Superior technically.
Supported locally.

Specifications

X-ray Excitation

50 W (50kV and 1mA) micro-focused W anode tube

Detector

Silicon solid state detector with 190eV resolution or better

Focal Depth

Single fixed focal depth with laser and auto focus

Video Magnification

30x Micro: Standard

55x Micro: Optional

7x Digital Zoom: Standard

Working Environment:

50°F (10°C) to 104°F (40°C) and up to 98% RH, non-condensing

Weight

25kg

Optional Manual XY Sample Stage

Table Size: 11x10"

Travel: 1.5x1.5"

Element Range

Aluminum 13 to Uranium 92

Analysis layers and elements

5 layers (4 layers + base) and 10 elements in each layer.

Composition analysis of up to 25 elements simultaneously

Filters/Collimators

4 primary filters / single collimator (optional dual)

Digital Pulse Processing

4096 CH digital multi-channel analyser with flexible shaping time. Automatic signal processing including dead time correction and escape peak correction

Processor:

Intel, CORE i5 3470 (3.2GHz), 8GB DDR3 Memory, Microsoft Windows 10 Prof, 64bit equivalent

Camera optics:

1/4" CMOS-1280x720 VGA resolution

Power Supply:

150W, 100~240 volts; frequency range 47Hz to 63Hz

Dimensions (HxWxD):

Internal: 100mm (4"), 325mm (13"), 300mm (12")

External: 325mm (13"), 350mm (14"), 450mm (18")

The Bowman Partner Network

Bowman's Partner Service Network was established to facilitate large multi-national projects in the PCB industry. Today, it has become the model for XRF technical service worldwide, serving board shops, electronics manufacturers, automotive and aerospace OEMs, jewelry manufacturers, the fastener industry, and contract metal finishers in all sectors.

The Bowman Partner Network enables XRF technical service experts worldwide to provide same-day response to every service, repair and upgrade requirement.



Bowman global partners are certified annually, and maintain the highest standards of excellence and best practices.



© Copyright 2022 Bowman



Made
in the USA

BOWMAN

1125 Remington Rd.
Schaumburg, IL 60173

› 847.781.3523

› www.bowmanxrf.com

› sales@bowmanxrf.com

XRF Equipment • Local Tech Support, Worldwide • Standards • ISO/IEC 17025 Accredited Lab